

Bullet III GPS Antenna

Jam-Resistant Active GPS Antenna

Key Features and Benefits

- High performance in any environment
- Waterproof, weatherproof
- Resists harsh RF jamming
- Proven extra rugged, reliable
- Available with choice of TNC or F-type connector

Whatever the environment—wet, cold, sunny, hot, harsh RF jamming—Trimble's Bullet™ III GPS antenna can take it, year after year. Designed primarily for stationary applications, the Bullet III antenna provides a perfect solution for manufacturers who need a fixed-site, rooftop GPS antenna. This antenna is also a high-quality solution for adding GPS RF signals to marine GPS navigation systems.

Put it anywhere

The antenna is housed in completely waterproof packaging designed to withstand exposure to shock, excessive vibration, extreme temperatures, rain, snow and sunlight. The enclosure is a textured off-white color and is both weatherproof and waterproof.

The enclosure is all plastic, including the threaded socket in the base of the antenna used for pole mounting, so there is no danger of corrosion. The threaded socket accepts either a 1"-14 straight thread (typical marine antenna mount) or a 3/4" pipe thread. The F-type or TNC antenna connector is located inside the threaded socket, which allows the antenna cable to be routed inside the pole and protects the cable connection for added reliability.



Bullet III HE jam-resistant active GPS antenna

Strong performance

The Bullet III antenna is an active GPS antenna with 35-dB preamp and dual bandpass filters. The high-gain preamp allows the Bullet III to be used with up to 75 feet of RG-59 cable. The bandpass filters improve immunity to other RF signals for reliable performance in hostile RF jamming environments.

Proven reliability

For over 15 years, Trimble has been producing GPS antennas renowned for their survivability in tough environments. The

Bullet III is the fourth generation of the proven Bullet antenna family (more than 40,000 delivered) and offers all the reliability and performance benefits that this exceptional field experience provides.

In unforgiving environments, an antenna failure could be disastrous. Don't risk it. Select a proven, stress-tested, GPS antenna—the Trimble Bullet III GPS antenna.

Bullet III GPS Antenna

Jam-Resistant Active GPS Antenna

ENVIRONMENTAL SPECIFICATIONS

Operating Temp:	-40° C to +85° C
Storage Temp:	-40° C to +100° C
Vibration:	10-200 Hz Log sweep 3g (Sweep time 30 minutes) 3 axes
Shock:	50 g vertical, 30 g all axes
Humidity:	Mil-STD-810E
Corrosion:	5% Salt spray
Waterproof:	Immersion to 1 meter

PHYSICAL CHARACTERISTICS

Dimensions:	3.05" D x 2.61" H (77.5 mm x 66.2 mm)
Weight:	6.0 oz (170 grams)
Enclosure:	Off-white plastic
Connector:	F-type or TNC
Mounting:	1"-14 thread or 3/4" pipe thread


TECHNICAL/PERFORMANCE SPECIFICATIONS

Prime power:	+5 Volts DC ($\pm 10\%$)
Power consumption:	30 mA maximum
Output impedance:	50 Ω
Frequency:	1575.42 MHz \pm 1.023 MHz
Polarization:	Right-hand circular polarization (RHCP)
VSWR:	2.0 maximum
Axial ratio:	90°: 4.0 dB maximum; 10°: 6 dB maximum
Gain:	35 dB \pm 3 dB
Noise:	3.3 dB maximum (25°C \pm 5°C)
Pass-band width:	50 MHz
Out of Band rejection:	f_o : 1575.42 MHz
	$f_o \pm 20$ MHz : 7dB min
	$f_o \pm 30$ MHz : 12dB min
	$f_o \pm 40$ MHz : 20dB min
	$f_o \pm 100$ MHz : 100dB min
Azimuth coverage:	360° (omni-directional)
Elevation coverage:	0° to 90° elevation (hemispherical)

CABLE SPECIFICATIONS

Type:	RG-59
Impedance:	75 Ω
Capacitance:	16.5 pF/foot (54.1 pF/meter)
Vel. of propagation:	84%
Shielding:	Foil and copper braid (100% coverage)
Connectors:	Waterproof F-type
Signal attenuation:	<10 dB for cable and connectors


DIAGRAM

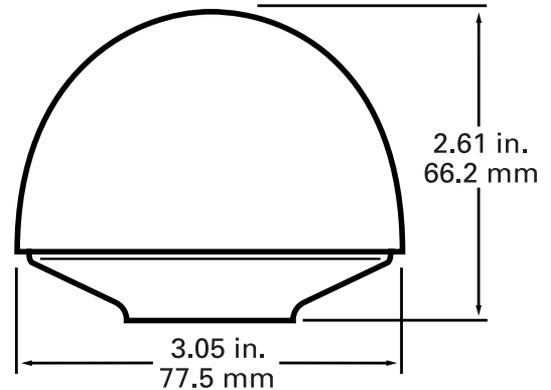

CONNECTORS



TNC

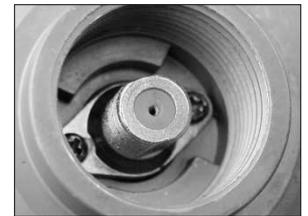

F-type

ORDERING INFORMATION

Accessories

Rooftop Antenna Kit	Bullet III antenna with 75 feet of RG-59 cable, 8-inch type F to SMB adapter and instructions. For use in fixed site applications such as timing. Compatible with SVeeEight™, ACE GPS™ and Lassen™ modules.
Bullet III Cable Kit	50-foot (15 meter) RG-59 antenna cable with F connectors

Please visit our website for current information, part numbers, and ordering information at:
www.trimble.com/timing



Trimble Navigation Limited
 645 North Mary Avenue
 Sunnyvale, CA 94086
 1.800.827.8000 Inside U.S.
 1.408.481.2000 Outside U.S.
www.trimble.com

Trimble Navigation Europe
 Limited
 Meridian Office Park
 Osborn Way, Hook
 Hampshire RG27 9HX, U.K.
 +44-1256-760150
 +44-1256-760148 Fax

Trimble Japan
 Shin-Ohashi Riverside
 Bldg.101 3F, 4F
 1-8-2 Shin-ohashi Kohtoh-ku,
 Tokyo 135-0007 JAPAN
 Tel: 81-3-5638-5018
 Fax: 81-3-3631-0712

Trimble Navigation
 Australia Pty Limited
 Level 1/123 Gotha Street
 Fortitude Valley QLD 4006
 Australia
 +61-7-3216-0044
 +61-7-3216-0088 Fax

